

# SMART STRING ENERGY STORAGE SYSTEM

LUNA2000-5/10/15-S0



**More Usable Energy**  
100% Depth of Discharge and  
Pack-Level Energy Optimization



**Flexible Investment**  
5 kWh Modular Design,  
Scalable from 5 to 30 kWh



**Safe & Reliable**  
5-layer Safety Protection  
IP66



**Easy Installation**  
12 kg Power Module  
50 kg Battery Module




**Quick Commissioning**  
Automatic Device  
Discovery by the App



**Perfect Compatibility**  
Compatible to Single & Three  
Phase Inverters

# LUNA2000-5/10/15-S0 Technical Specification

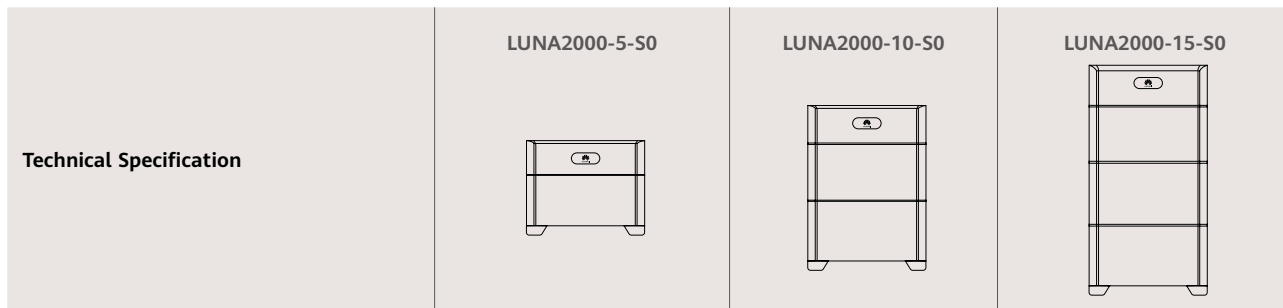

Performance			
Power module	LUNA2000-5KW-C0		
Number of power modules	1		
Battery module	LUNA2000-5-E0		
Battery module capacity	5 kWh		
Number of battery modules	1	2	3
Battery usable capacity <sup>1</sup>	5 kWh	10 kWh	15 kWh
Max. output power	2.5 kW	5 kW	5 kW
Peak output power	3.5 kW, 10 s	7 kW, 10 s	7 kW, 10 s
Nominal voltage (single-phase system)	450 V		
Operating voltage range (single-phase system)	350-560 V		
Nominal voltage (three-phase system)	600 V		
Operating voltage range (three phase system)	600 ~ 980 V		
Communication			
Display	SOC status indicator, LED indicator		
Communication	RS485/CAN (only for parallel operation)		
General Specification			
Dimensions (W x D x H)	670 mm x 150 mm x 600 mm (26.4 in. x 5.9 in. x 23.6 in.)	670 mm x 150 mm x 960 mm (26.4 in. x 5.9 in. x 37.8 in.)	670 mm x 150 mm x 1320 mm (26.4 in. x 5.9 in. x 60.0 in.)
Weight (Floor stand toolkit included)	63.8 kg (140.7 lb)	113.8 kg (250.9 lb)	163.8 kg (361.1 lb)
Power module dimension (W x D x H)	670 mm x 150 mm x 240 mm (26.4 in. x 5.9 in. x 9.4 in.)		
Power module weight	12 kg (26.5 lb)		
Battery module dimensions (W x D x H)	670 mm x 150 mm x 360 mm (26.4 in. x 5.9 in. x 14.0 in.)		
Battery module weight	50 kg (110.2 lb) <sup>2</sup>		
Installation	Floor stand (standard), Wall mount (optional)		
Operating temperature	-20°C to +55°C (-4°F to +131°F) <sup>3</sup>		
Max. operating altitude	4,000 m (13,123 ft.) (Derating above 2,000 m)		
Environment	Outdoor / Indoor <sup>4</sup>		
Relative humidity	5%-95% RH		
Cooling	Natural convection		
IP rating	IP 66		
Noise emission <sup>5</sup>	< 29 dB		
Cell technology	Lithium-iron phosphate (LiFePO4)		
Compatible inverters <sup>6</sup>	SUN2000-2/3/3.68/4/4.6/5/6KTL-L1, SUN2000-8/10K-LC0 SUN2000-3/4/5/6/8/10KTL-M1, SUN2000-12/15/17/20/25K-MB0		
Standards Compliance (More Available Upon Request)			
Certificates	CE, RCM, CEC, VDE2510-50, IEC62619, IEC 60730, UN38.3		
Ordering and Deliverable Part			
Available for ordering <sup>7</sup>	LUNA2000-5KW-C0, LUNA2000-5-E0, LUNA2000 Wall Mounting Bracket		

\*1 Test conditions: 100% depth of discharge (DoD), 0.2C rate charge & discharge at 25°C, at the beginning of life. If no PV modules are installed or the system has not detected sunlight for at least 24 hours, the minimum end of discharge SOC is 15%.

\*2 The weight of the battery module is subject to the actual product, with a tolerance of ±3%.

\*3 Refer to battery warranty letter for conditional application.

\*4 Outdoor installation is recommended. For indoor installation, refer to the user manual for instruction.

\*5 Noise level (typical): < 29 dB(A) @1 m, 30°C, power on and run stably for 2 hours

\*6 Please contact local engineer for the compatibility.

\*7 Storage system is ordered and delivered in the form of power module and battery module separately with corresponding quantity.